


STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 125.7 / 128.7 (CENTRAL SOUTH)
- 124.9 / 125.7 (SOUTH)
- 8942 / 5655 (SEA-2 HF)
APP - 120.4 (KALIBO)
TWR - 118.6 / 122.6

AKLAN/Godofredo P.
Ramos (RPVE)
RNP STAR RWY 06
KLO7A TAPER7A/7B

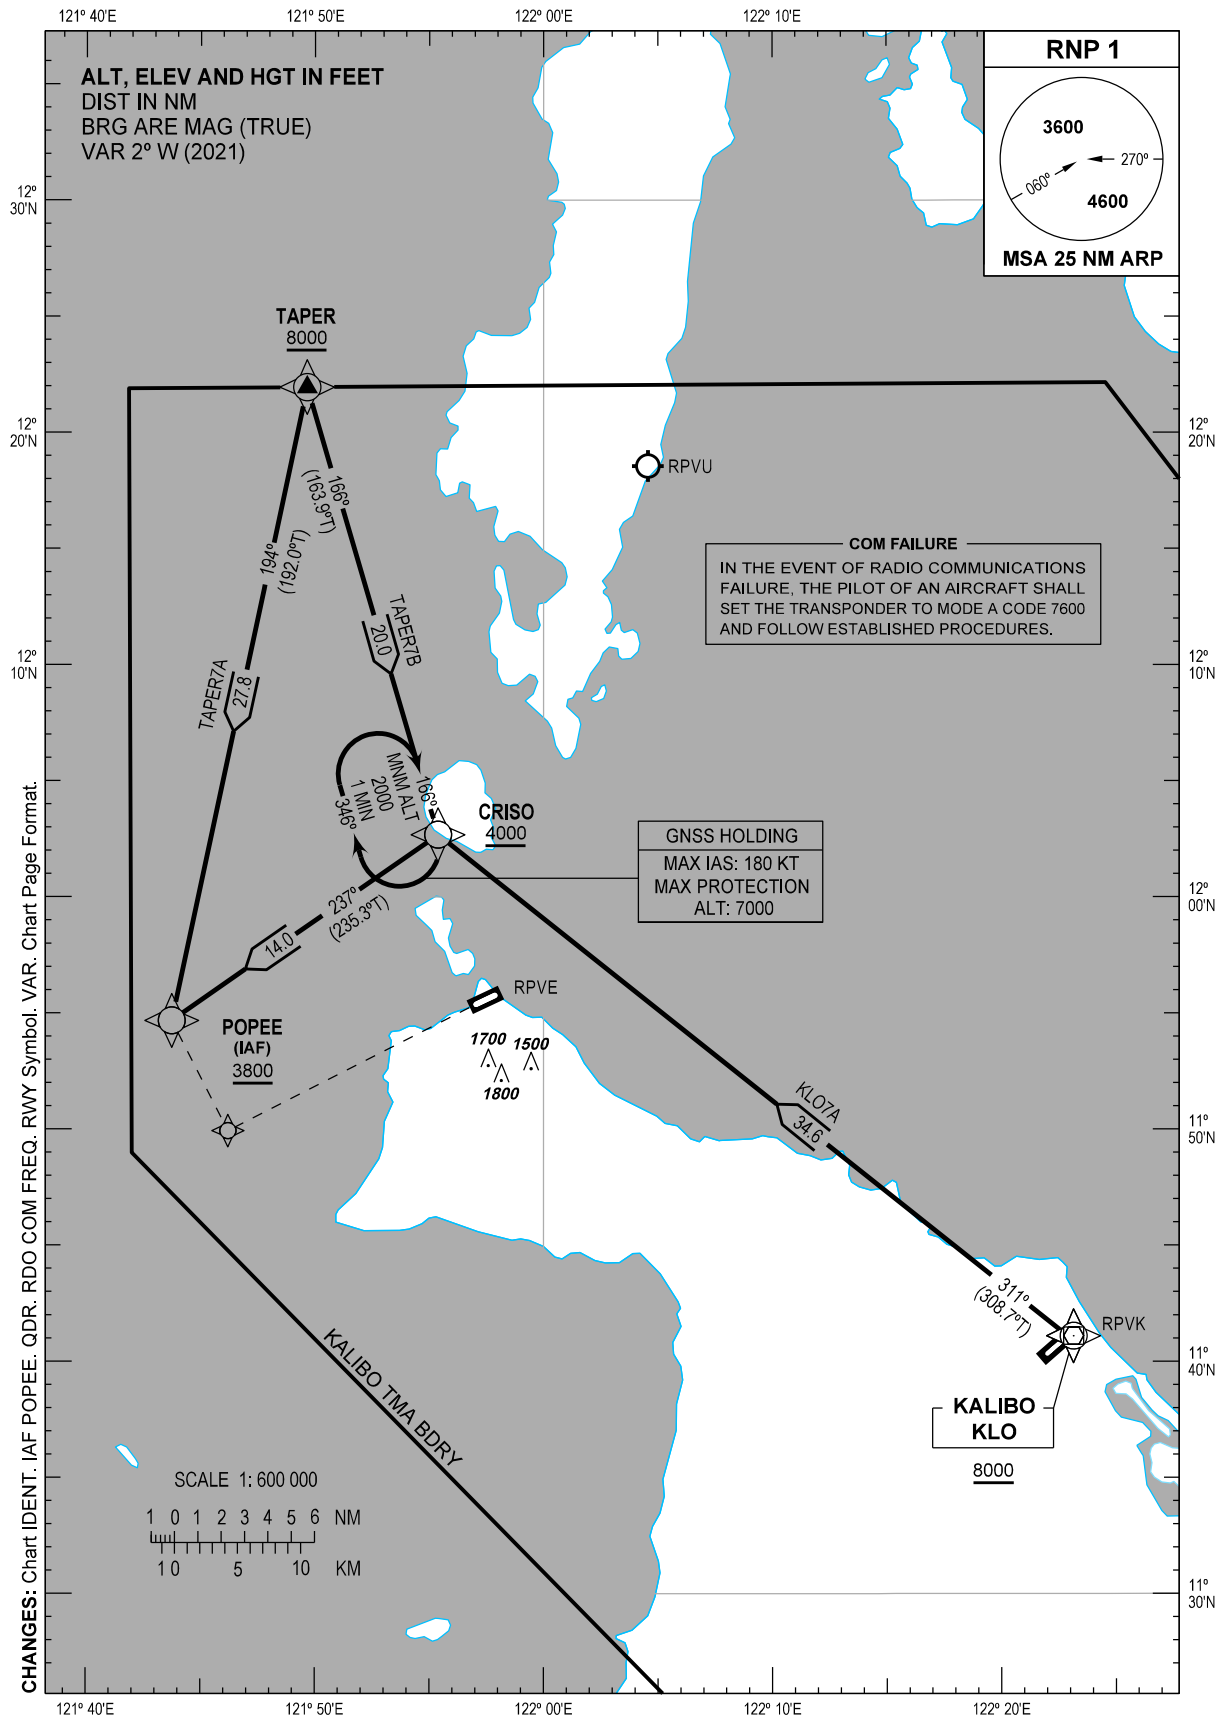

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
KLO7A	KLO - CRISO - POPEE	From KLO at or above 8000 FT, to CRISO at or above 4000 FT, to POPEE at or above 3800 FT.	
TAPER7A	TAPER - POPEE	From TAPER at or above 8000FT, to POPEE at or above 3800 FT.	
TAPER7B	TAPER - CRISO - POPEE	From TAPER at or above 8000 FT, to CRISO at or above 4000 FT, to POPEE at or above 3800 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
CRISO	120240.6N	1215523.0E	Fly-by
KLO	114100.8N	1222259.8E	Fly-by
POPEE	115440.5N	1214344.7E	Fly-by
TAPER	122156.7N	1214939.1E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 06

Table 1: KLO7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	KLO	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	CRISO	-	311 (308.7)	+2	34.6	-	+4000	-	-	RNP1	-
30	TF	POPEE	-	237 (235.3)	+2	14.0	-	+3800	-	-	RNP1	-

Table 2: TAPER7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAPER	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	POPEE	-	194 (192.0)	+2	27.8	-	+3800	-	-	RNP1	-

Table 3: TAPER7B

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAPER	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	CRISO	-	166 (163.9)	+2	20.0	-	+4000	-	-	RNP1	-
30	TF	POPEE	-	237 (235.3)	+2	14.0	-	+3800	-	-	RNP1	-

CHANGES: COORD Format. QDR. VAR. Page Format.