


STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 125.7 / 128.7 (CENTRAL SOUTH)
- 124.9 / 125.7 (SOUTH)
- 8942 / 5655 (SEA-2 HF)
APP - 120.4 (KALIBO)
TWR - 118.6 / 122.6

AKLAN/Godofredo P.
Ramos (RPVE)
RNP STAR RWY 24
KLO5A TAPER5A/5B

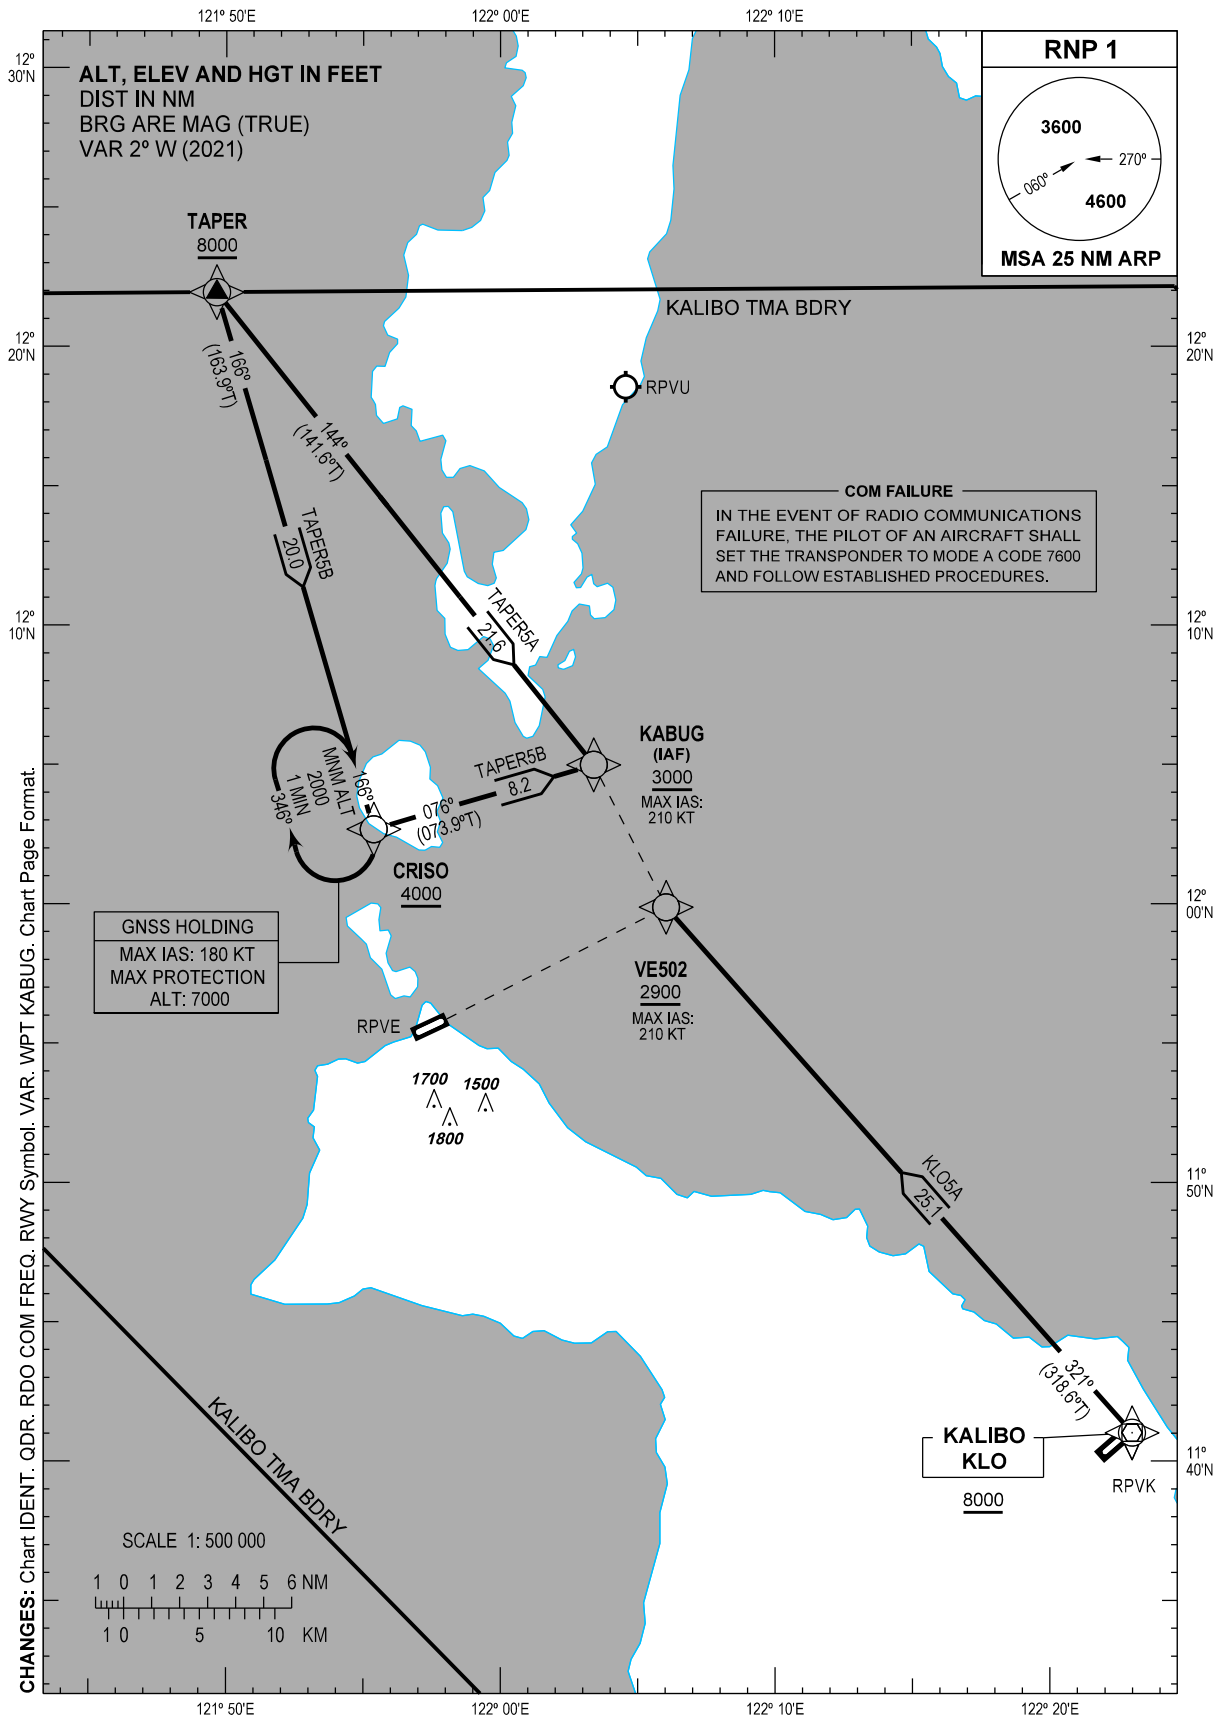

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
KLO5A	KLO - VE502	From KLO at or above 8000 FT, to VE502 at or above 2900 FT.	
TAPER5A	TAPER - KABUG	From TAPER at or above 8000 FT, to KABUG at or above 3000 FT.	
TAPER5B	TAPER - CRISO - KABUG	From TAPER at or above 8000 FT, to CRISO at or above 4000 FT, to KABUG at or above 3000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
CRISO	120240.6N	1215523.0E	Fly-by
KABUG	120459.3N	1220324.1E	Fly-by
KLO	114100.8N	1222259.8E	Fly-by
TAPER	122156.7N	1214939.1E	Fly-by
VE502	115952.9N	1220602.5E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 24

Table 1: KLO5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	KLO	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	VE502	-	321 (318.6)	+2	25.1	-	+2900	-210	-	RNP1	-

Table 2: TAPER5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAPER	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	KABUG	-	144 (141.6)	+2	21.6	-	+3000	-210	-	RNP1	-

Table 3: TAPER5B

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAPER	-	-	-	-	-	+8000	-	-	RNP1	-
20	TF	CRISO	-	166 (163.9)	+2	20.0	-	+4000	-	-	RNP1	-
30	TF	KABUG	-	076 (073.9)	+2	8.2	-	+3000	-210	-	RNP1	-

CHANGES: COORD Format. QDR. Speed Limit. VAR. WPT KABUG. Page Format.