


STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 120.5 (CENTRAL NORTH)
- 132.7 (CENTRAL WEST)
APP - 119.2 (CLARK)
TWR - 118.2 / 122.2

SUBIC BAY FREEPORT ZONE/
Subic Bay (RPLB)
RNP STAR RWY 07
EXOLO1G KIBOK1G
NATIB1G SILAG1G

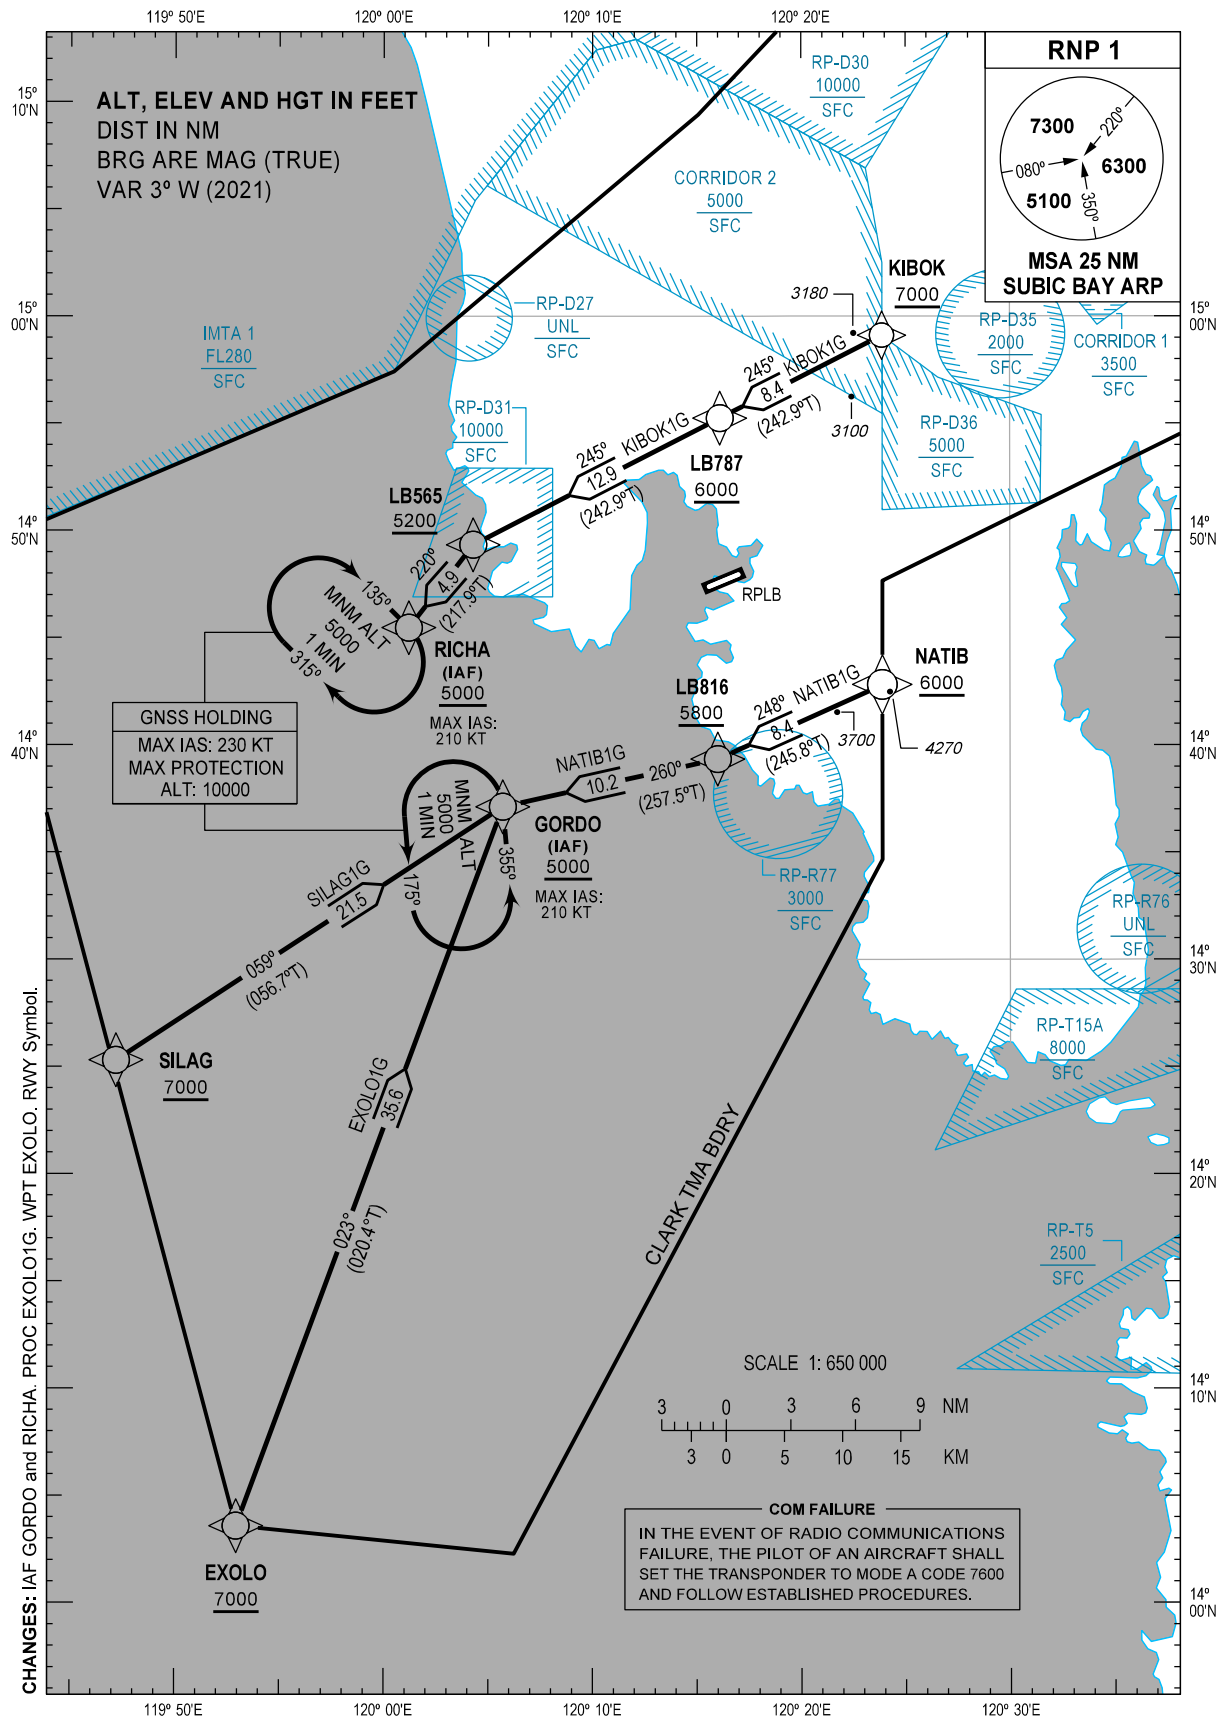

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
EXOLO1G	EXOLO - GORDO	From EXOLO at or above 7000 FT, to GORDO at or above 5000 FT.	
KIBOK1G	KIBOK - LB787 - LB565 - RICHA	From KIBOK at or above 7000 FT, to LB787 at or above 6000 FT, to LB565 at or above 5200 FT, to RICHA at or above 5000 FT.	
NATIB1G	NATIB - LB816 - GORDO	From NATIB at or above 6000 FT, to LB816 at or above 5800 FT, to GORDO at or above 5000 FT.	
SILAG1G	SILAG - GORDO	From SILAG at or above 7000 FT, to GORDO, at or above 5000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
EXOLO	140334.9N	1195256.8E	Fly-by
GORDO	143707.0N	1200543.0E	Fly-by
KIBOK	145905.7N	1202352.8E	Fly-by
LB565	144920.0N	1200418.0E	Fly-by
LB787	145514.0N	1201607.0E	Fly-by
LB816	143920.0N	1201601.0E	Fly-by
NATIB	144247.2N	1202352.8E	Fly-by
RICHA	144528.0N	1200113.0E	Fly-by
SILAG	142517.6N	1194712.3E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 07

Table 1: EXOLO1G

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	EXOLO	-	-	-	-	-	+7000	-	-	RNP1	RW07
20	TF	GORDO	-	023 (020.4)	+3	35.6	-	+5000	-210	-	RNP1	RW07

Table 2: KIBOK1G

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	KIBOK	-	-	-	-	-	+7000	-	-	RNP1	RW07
20	TF	LB787	-	245 (242.9)	+3	8.4	-	+6000	-	-	RNP1	RW07
30	TF	LB565	-	245 (242.9)	+3	12.9	-	+5200	-	-	RNP1	RW07
40	TF	RICHA	-	220 (217.9)	+3	4.9	-	+5000	-210	-	RNP1	RW07

CHANGES: PROC and Proposed Coding EXOLO1G. Speed Limit. WPT EXOLO. COORD Format.

Table 3: NATIB1G

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NATIB	-	-	-	-	-	+6000	-	-	RNP1	RW07
20	TF	LB816	-	248 (245.8)	+3	8.4	-	+5800	-	-	RNP1	RW07
30	TF	GORDO	-	260 (257.5)	+3	10.2	-	+5000	-210	-	RNP1	RW07

Table 4: SILAG1G

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	SILAG	-	-	-	-	-	+7000	-	-	RNP1	RW07
20	TF	GORDO	-	059 (056.7)	+3	21.5	-	+5000	-210	-	RNP1	RW07

CHANGE: Speed Limit.

INTENTIONALLY
LEFT
BLANK