



MANILA/Ninoy
Aquino Intl (RPLL)
RNP RWY 24

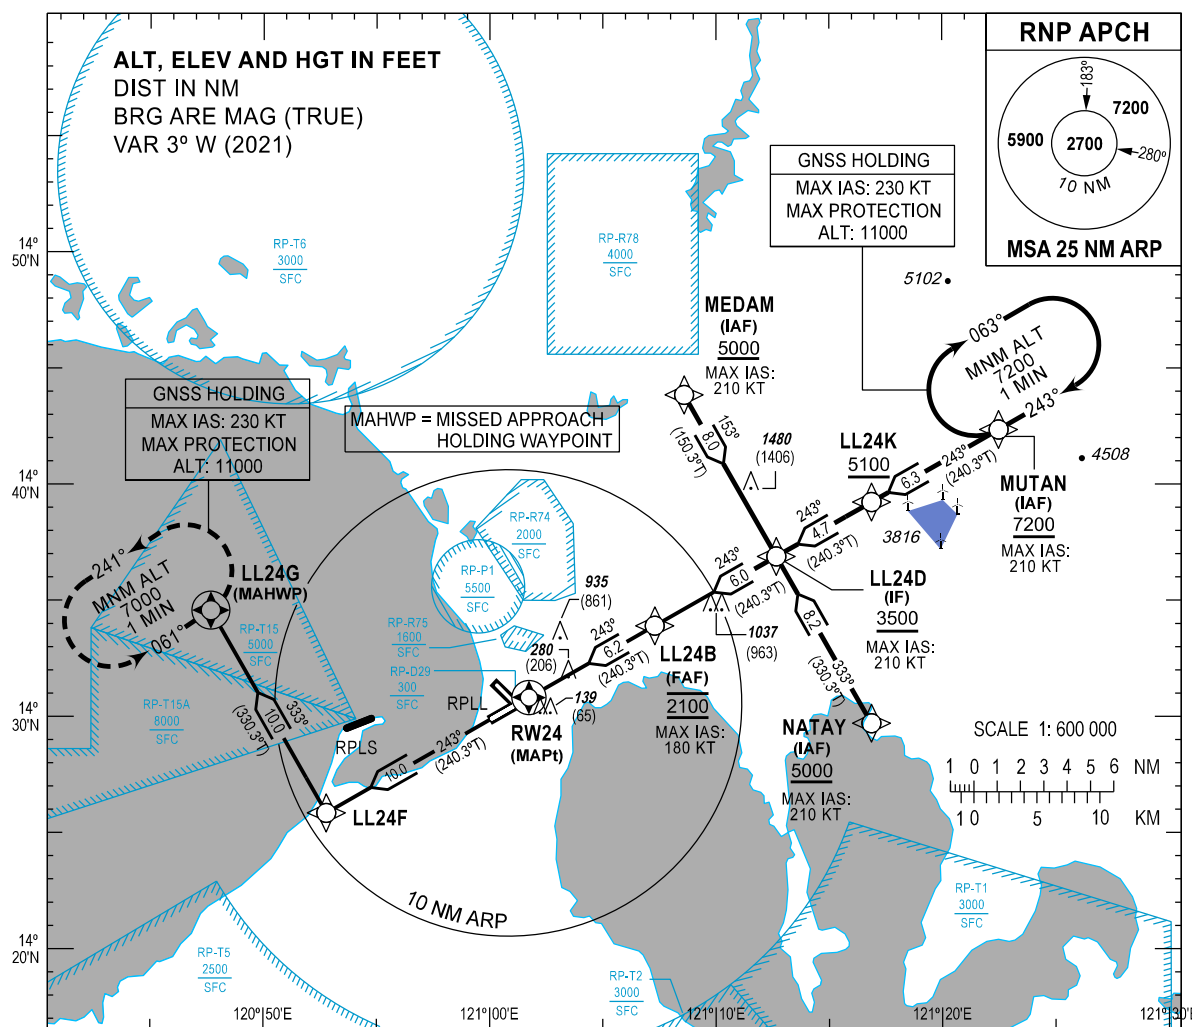

Climb on course **243°M** to **LL24F**, to **LL24G** and hold at **7000 FT** or as instructed by ATC.

TRANSITION ALT : 11000
TRANSITION LEVEL : FL130

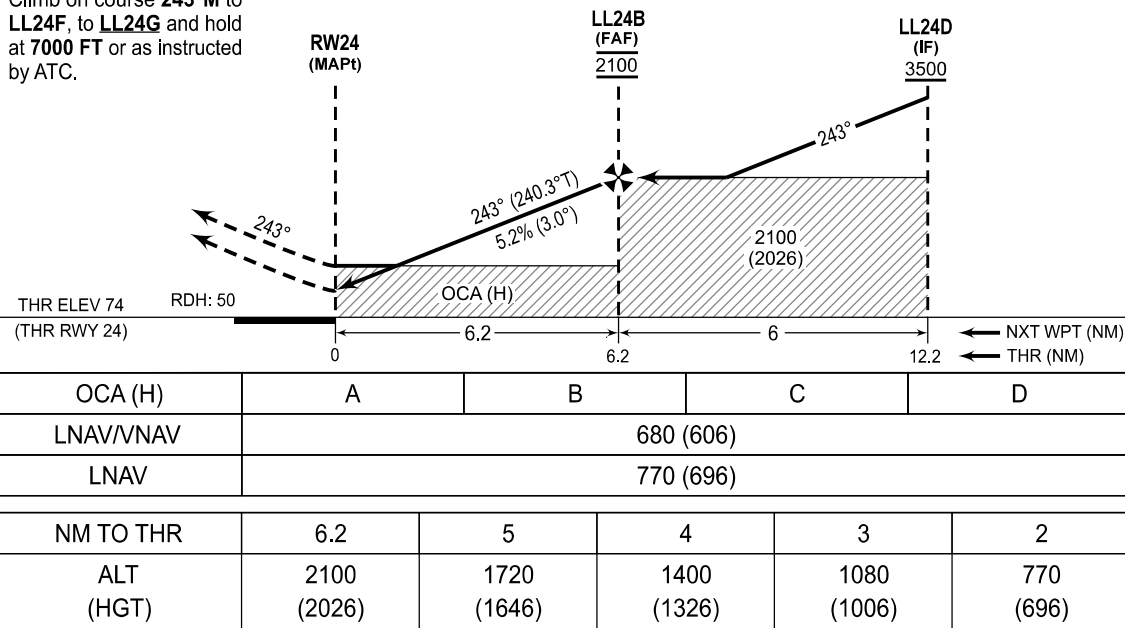

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
LL24B	N14 33 55	E121 07 18	Fly-by
LL24D	N14 36 54	E121 12 40	Fly-by
LL24F	N14 25 51	E120 52 47	Fly-by
LL24G	N14 34 35	E120 47 40	Flyover
LL24K	N14 39 14	E121 16 52	Fly-by
MEDAM	N14 43 51	E121 08 35	Fly-by
MUTAN	N14 42 21	E121 22 30	Fly-by
NATAY	N14 29 43	E121 16 52	Fly-by
RW24	N14 30 49.78	E121 01 44.02	Flyover

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 24

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	MEDAM	-	-	-	-	-	+5000	210	-	RNP APCH	MEDAM
20	TF	LL24D	-	153 (150.3)	+3	8.0	-	+3500	210	-	RNP APCH	MEDAM
10	IF	NATAY	-	-	-	-	-	+5000	210	-	RNP APCH	NATAY
20	TF	LL24D	-	333 (330.3)	+3	8.2	-	+3500	210	-	RNP APCH	NATAY
10	IF	MUTAN	-	-	-	-	-	+7200	210	-	RNP APCH	MUTAN
20	TF	LL24K	-	243 (240.3)	+3	6.3	-	+5100	-	-	RNP APCH	MUTAN
30	TF	LL24D	-	243 (240.3)	+3	4.7	-	+3500	210	-	RNP APCH	MUTAN
10	IF	LL24D	-	-	-	-	-	+3500	210	-	RNP APCH	-
20	TF	LL24B	-	243 (240.3)	+3	6.0	-	@2100	180	-	RNP APCH	-
30	TF	RW24	Y	243 (240.3)	+3	6.2	-	+124	-	-3.0/-	RNP APCH	-
10	CF	LL24F	-	243 (240.3)	+3	10.0	-	-	-	-	RNP APCH	-
20	TF	LL24G	Y	333 (330.3)	+3	10.0	-	+7000	-	-	RNP APCH	-

CHANGES: LL24G and RW24 COORD. MAG Course. RW24 ALT. VAR. Page Format.