


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 118.2 / 122.2
APP - 119.2 (CLARK)
ACC - 120.5 (CENTRAL NORTH)
- 132.7 (CENTRAL WEST)

SUBIC BAY FREEPORT ZONE/
Subic Bay (RPLB)
RNP SID RWY 07
EISMA1H

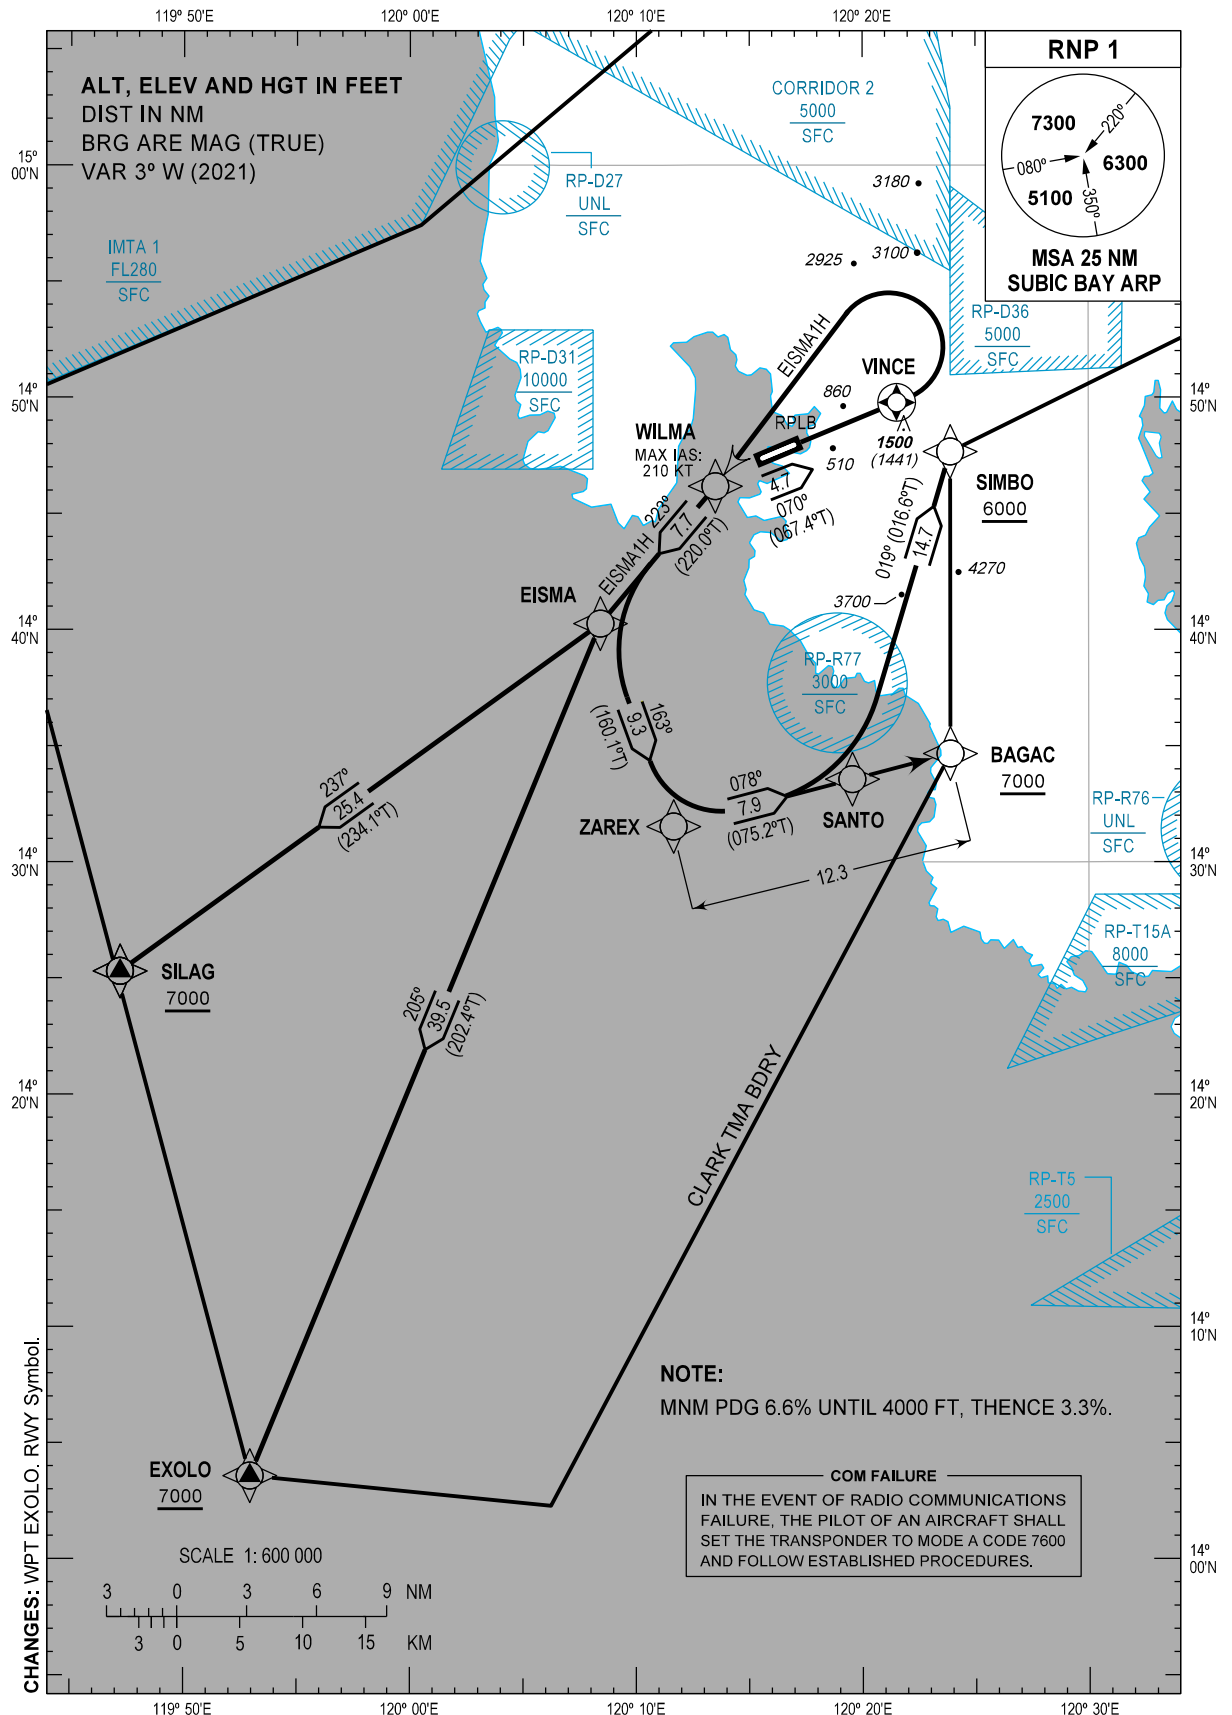

DEPARTURE ROUTE DESCRIPTION

SID	TRANSITION	TAKE-OFF	PROCEDURE	REMARKS
EISMA1H		RWY 07	Climb on course 070°M. At <u>VINCE</u> , turn left direct to WILMA, to EISMA.	MNM PDG 6.6% until 4000 FT, thence 3.3%. MAX IAS 210 KT until WILMA.
	BAGAC		From EISMA, to ZAREX, to BAGAC at or above 7000 FT.	
	EXOLO		From EISMA, to EXOLO at or above 7000 FT.	
	SILAG		From EISMA, to SILAG at or above 7000 FT.	
	SIMBO		From EISMA, to ZAREX, to SANTO, to SIMBO at or above 6000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BAGAC	143440.3N	1202352.8E	Fly-by
EISMA	144016.0N	1200825.0E	Fly-by
EXOLO	140334.9N	1195256.8E	Fly-by
SANTO	143334.0N	1201933.0E	Fly-by
SILAG	142517.6N	1194712.3E	Fly-by
SIMBO	144740.2N	1202352.8E	Fly-by
VINCE	144947.0N	1202131.0E	Flyover
WILMA	144611.0N	1201330.0E	Fly-by
ZAREX	143132.0N	1201139.0E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 07

Table 1: EISMA1H

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	VINCE	Y	070 (067.4)	+3	4.7	-	-	-	-	RNP1	RW07
20	DF	WILMA	-	-	-	-	L	-	-210	-	RNP1	RW07
30	TF	EISMA	-	223 (220.0)	+3	7.7	-	-	-	-	RNP1	RW07

Table 2: BAGAC TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	EISMA	-	-	-	-	-	-	-	-	RNP1	RW07
20	TF	ZAREX	-	163 (160.1)	+3	9.3	-	-	-	-	RNP1	RW07
30	TF	BAGAC	-	078 (075.2)	+3	12.3	-	+7000	-	-	RNP1	RW07

CHANGES: PROC EXOLO Transition. Speed Limit. WPT EXOLO. COORD Format.

Table 3: EXOLO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	EISMA	-	-	-	-	-	-	-	-	RNP1	RW07
20	TF	EXOLO	-	205 (202.4)	+3	39.5	-	+7000	-	-	RNP1	RW07

Table 4: SILAG TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	EISMA	-	-	-	-	-	-	-	-	RNP1	RW07
20	TF	SILAG	-	237 (234.1)	+3	25.4	-	+7000	-	-	RNP1	RW07

Table 5: SIMBO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	EISMA	-	-	-	-	-	-	-	-	RNP1	RW07
20	TF	ZAREX	-	163 (160.1)	+3	9.3	-	-	-	-	RNP1	RW07
30	TF	SANTO	-	078 (075.2)	+3	7.9	-	-	-	-	RNP1	RW07
40	TF	SIMBO	-	019 (016.6)	+3	14.7	-	+6000	-	-	RNP1	RW07

CHANGE: Proposed Coding EXOLO Transition.

INTENTIONALLY
LEFT
BLANK